EN

Tillers
















suitable for cultivation in vegetable plantations and greenhouses. Available in seven working widths, it can the body make it a handy and versatile machine.

The ZLL model is a lightweight rotary tiller particularly be equipped with tractors with a power of between 20 and 35 horsepower. The low weight and compactness of

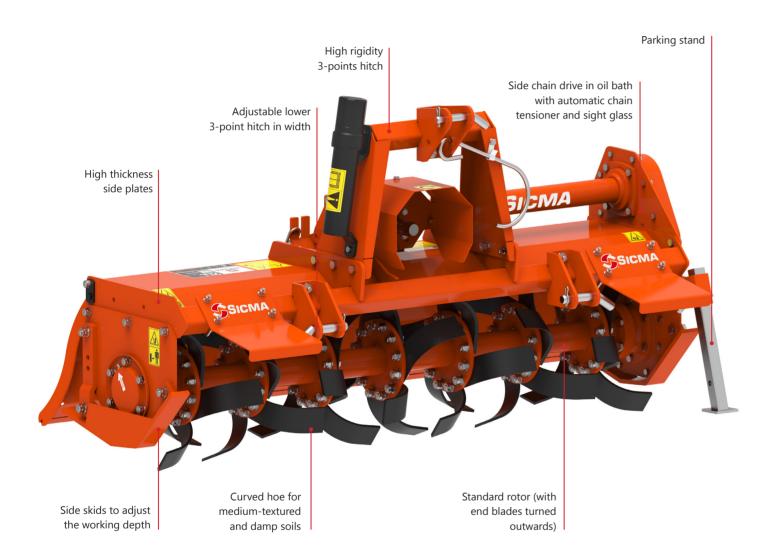

Double boxedsheet metal frame	APP.
SICMA production gears made of heat-treated — alloy steel	
"Long life" seal	
in the rotor bearings	

Universal shaft size 4

Leftwards turning (OPTIONAL)

1-speed gearbox made by SICMA with conical

Transmission

extension tube

roller bearings







CURVED HOE Recommended for medium-textured and moist soils.



SQUARE HÒE Recommended for sandy soils.

OPTIONAL



Flexible clutch

In case of sudden absorption of power there are two discs that slide, thereby redistributing the forces.



Shear bolt

They adjust the working depth of the rotary tiller.

TECHNICAL DATA

SEUROCARDAN

Reducer speed:





Models and Features:

	⊕ ⊕ HP	mm (in)	mm (in)	kg (lbs)	nr.	nr.	cat.
ZLL 90	20 ▶ 35	900 (35")	1300 (41")	126 (276)	16	24	1
ZLL 100	20 ▶ 35	1000 (39")	1130 (44")	136 (300)	20	30	1
ZLL 110	20 ▶ 35	1100 (43")	1230 (48")	146 (322)	20	30	1
ZLL 120	20 ▶ 35	1200 (47")	1330 (52")	160 (353)	24	36	1
ZLL 130	20 ▶ 35	1300 (51")	1430 (56")	166 (366)	24	36	1
ZLL 140	20 ▶ 35	1400 (55")	1530 (60")	176 (388)	28	42	1
ZLL 150	20 ▶ 35	1500 (59")	1630 (64")	180 (397)	28	42	1

The experience that cultivates the future of your land

SICMA S.p.a. is an Italian company and a leader in the professional agricultural machinery sector. We design and create cutting-edge solutions for you, the farmer of tomorrow. Innovation and passion at your service.





Sicma SpA

Contrada Cerreto, 39 66010 Miglianico (CH) Tel. +39 0871 95841 info@sicma.it - www.sicma.it





