

Tillers

SA

 **SICMA[®]**

SA



10 ► 20 HP



850 ► 1250




Max 160



Very light

The SA model is the lightest tiller in the Sicma range and with its low energy absorption it can be used on tractors with powers of between 10 and 20 horsepower.


Its manual lateral movement make it a very popular model; easy to manoeuvre and transport, it is suitable for light use.

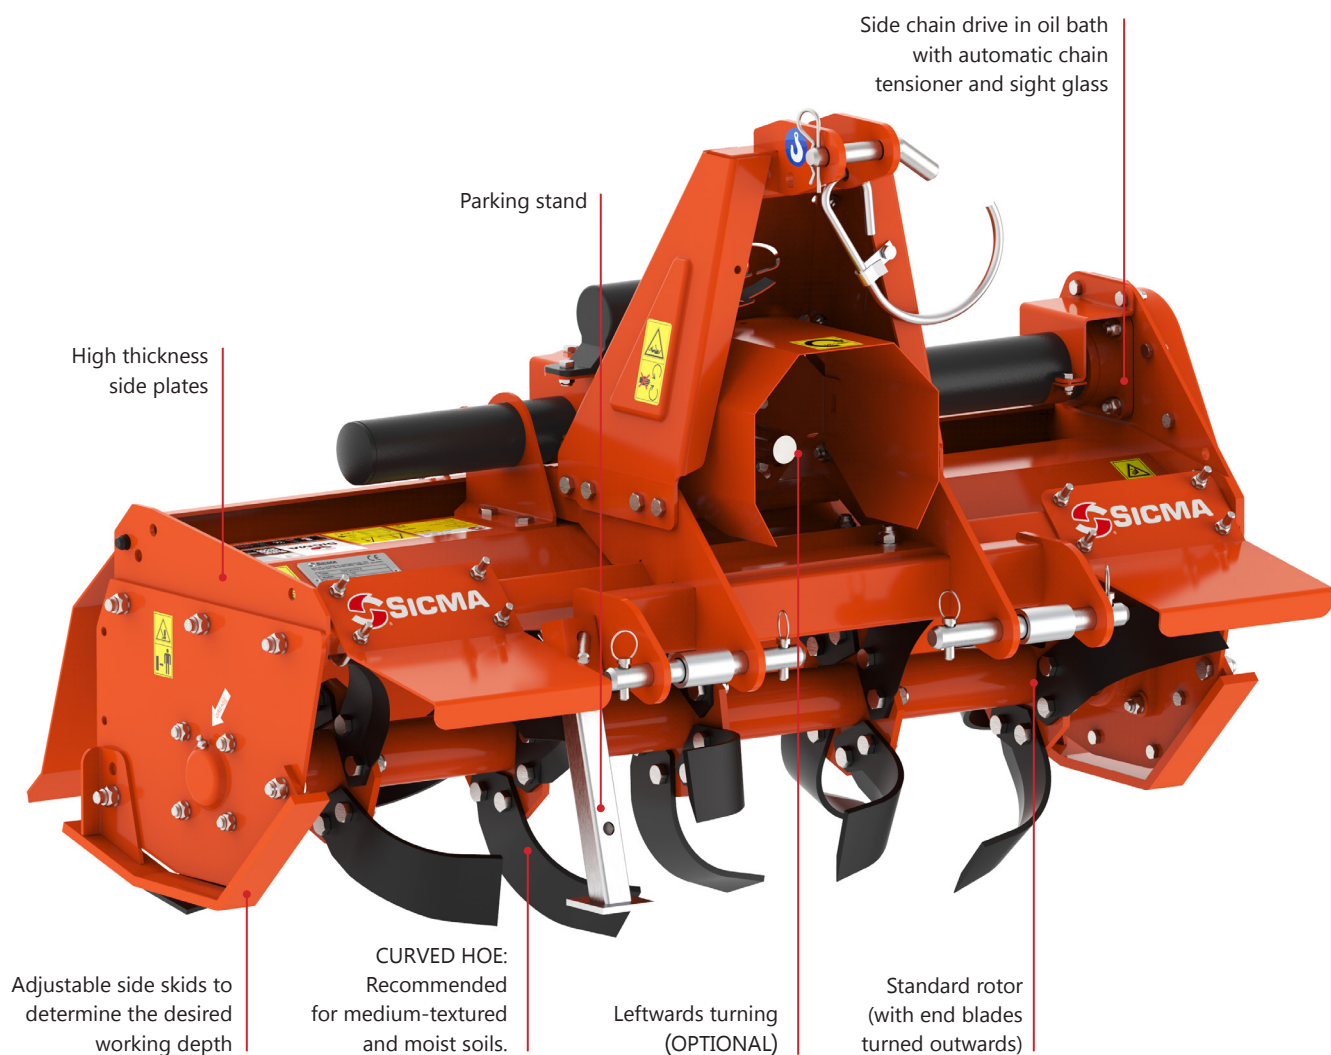

Double boxed sheet metal frame

SICMA production gears made of heat-treated alloy steel

"Long life" seal in the rotor bearings

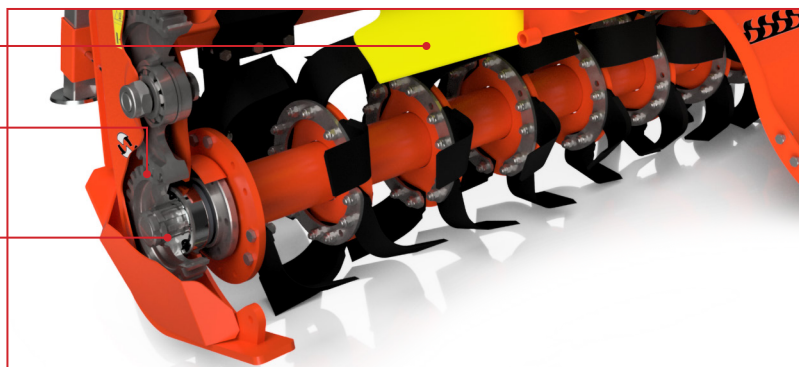



Universal
shaft size 4



OPTIONAL



Flexible clutch

In case of sudden absorption of power there are two discs that slide, thereby redistributing the forces.



Shear bolt

They adjust the working depth of the rotary tiller.

TECHNICAL DATA

Reducer speed:

540 rpm

253 rpm

Models and Features:

	HP	mm (in)	mm (in)	mm (in)	kg (lbs)	nr. 4	cat.
SA 85	10 ▶ 20	850 (33")	920 (36")	240 (10")	110 (242)	16	1
SA 105	10 ▶ 20	1050 (41")	1120 (44")	340 (13")	120 (264)	20	1
SA 125	10 ▶ 20	1250 (49")	1320 (52")	440 (17")	130 (287)	24	1

*The experience that cultivates
the future of your land*

SICMA S.p.a. is an Italian company and a leader in
the professional agricultural machinery sector.
We design and create cutting-edge solutions for
you, the farmer of tomorrow. Innovation and
passion at your service.



MIGLIANICO | ABRUZZO | ITALY

Sicma SpA

Contrada Cerreto, 39

66010 Miglianico (CH)

Tel. +39 0871 95841

info@sicma.it - www.sicma.it

