

Tillers

HL

 **SICMA®**

# HL



25 ▶ 55 HP



1200 ▶ 1650





Max 210



Light

The HL rotary tiller is an entry-level model in the movable series with a sensor for automatic retraction. It is characterised by its light weight and can be easily used

with tractors up to 45 HP (for 165 cm max). The lateral movement has a stroke of 300 mm in both the vineyard and orchard versions.

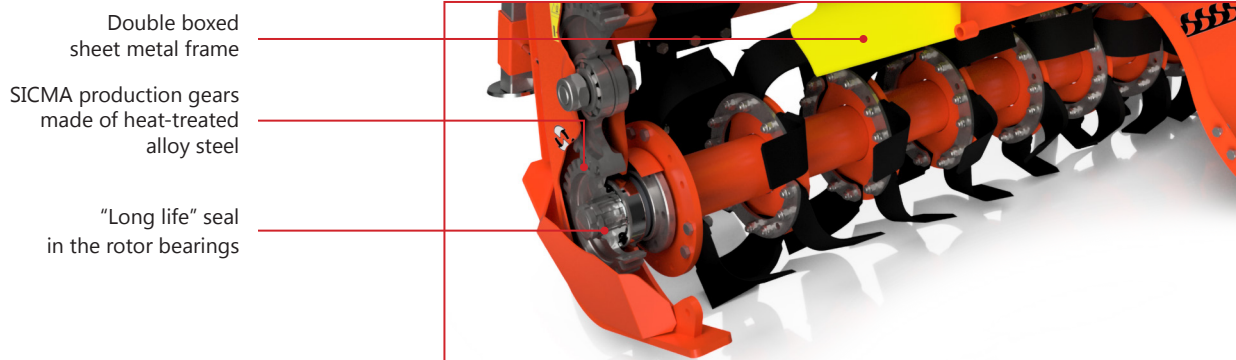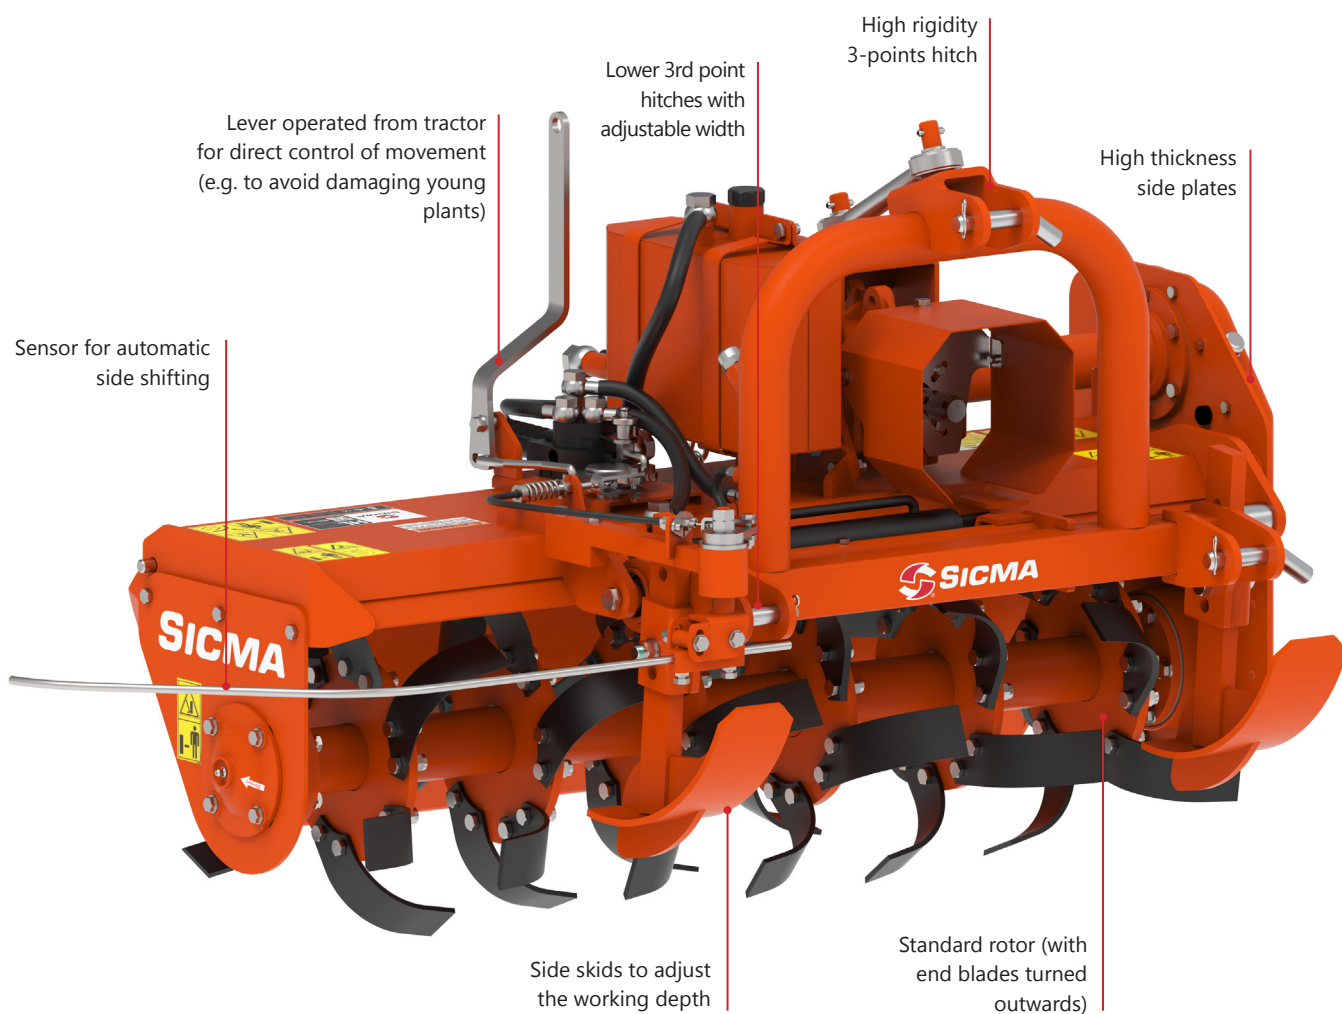



Universal  
shaft size 5



**CURVED HOE**  
Recommended for  
medium-textured  
and moist soils.



**SQUARE  
HOE**  
Recommended  
for sandy soils.

Independent hydraulic  
tank and circuit

Side chain drive in oil  
bath with automatic  
chain tensioner and  
sight glass

1-speed gearbox made by SICMA  
with oil level dip stick

Hydraulic  
shifting, also  
available during  
operations



OPTIONAL



Flexible clutch

In case of sudden  
absorption of power there  
are two discs that slide,  
thereby redistributing the  
forces.



Shear bolt

They adjust the working  
depth of the rotary tiller.



Spring loaded cover kit

It firmly presses the hood on  
the ground to achieve greater  
soil levelling

TECHNICAL DATA

Reducer speed:

540 rpm

264 rpm

Models and Features:

	HP	mm (in)	mm (in)	mm (in)	kg (lbs)	nr. 6	cat.
HL 125	25 ▶ 45	1250 (49")	1420 (56")	300 (12")	295 (650)	36	1
HL 145	25 ▶ 45	1450 (57")	1620 (64")	300 (12")	315 (694)	42	1
HL 165	25 ▶ 45	1650 (65")	1820 (72")	300 (12")	335 (738)	48	1

*The experience that cultivates  
the future of your land*

SICMA S.p.a. is an Italian company and a leader in  
the professional agricultural machinery sector.  
We design and create cutting-edge solutions for  
you, the farmer of tomorrow. Innovation and  
passion at your service.



MIGLIANICO | ABRUZZO | ITALY

**Sicma SpA**

Contrada Cerreto, 39  
66010 Miglianico (CH)  
Tel. +39 0871 95841

**info@sicma.it - [www.sicma.it](http://www.sicma.it)**

