

Tillers

RMF



SICMA[®]

RMF



40 ► 80 HP



1350 ► 2350



Max 240



Heavy

The RMF is a very heavy hydraulic tiller suitable for tractors with power up to 80 HP for professional use. Despite being very heavy, it has a considerable movement on a chrome bar.

High thickness
side plates

Side gear drive in oil
bath and sight glass



Side skirts to adjust
the working depth

Hydraulic shifting,
also available during
operations


Standard rotor (with
end blades turned
outwards)

OPTIONAL

Double boxed
sheet metal frame

SICMA production gears
made of heat-treated
alloy steel

Long life seal
in the rotor bearings

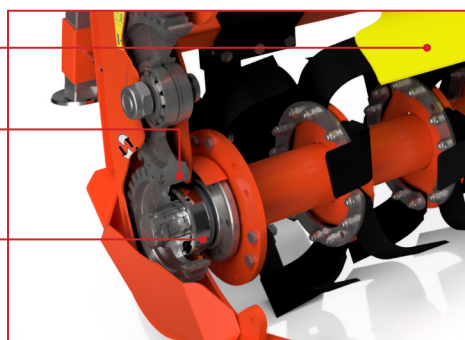

Spring loaded cover kit

Useful when the 4 speeds are not
required



Spring loaded cover kit

It firmly presses the hood on the
ground to achieve greater soil
levelling



PTO shaft
(eurocardan)
size 6



4-speed gearbox made by SICMA, with tapered roller bearings and oil level dip stick

High rigidity
3-points hitch



CURVED HOE
Recommended for medium-textured and moist soils.



SQUARE HOE
Recommended for sandy soils.

ROTOR VERSIONS


PUGLIA ROTOR

This rotor has hoe blades at the ends facing inward, which avoid cutting roots. Used for tree and vineyard crops.







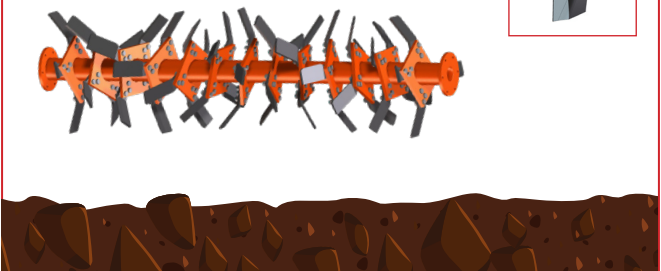




BLADE ROTOR WITH SINGLE BOLT FIXING

For hard and wet soils that require more incisive tilling.












TECHNICAL DATA

Reducer speed:

 540 rpm	15 - 18 	 185 rpm	17 - 16 	 235 rpm
	16 - 17 	 208 rpm	18 - 15 	 266 rpm

Models and Features:

	 HP	 mm (in)	 mm (in)	 mm (in)	 kg (lbs)	 nr. 4	 nr. 6	 nr.	 cat.
RMF 135	40 ▶ 80	1350 (53")	1450 (57")	420 (17")	496 (1093)	20	30	n/a	1/2
RMF 150	40 ▶ 80	1500 (59")	1600 (63")	420 (17")	530 (1168)	24	36	n/a	1/2
RMF 160	40 ▶ 80	1600 (63")	1700 (67")	420 (17")	535 (1179)	24	36	n/a	1/2
RMF 185	40 ▶ 80	1850 (73")	1950 (77")	420 (17")	584 (1287)	28	42	44	1/2
RMF 210	40 ▶ 80	2100 (83")	2200 (87")	420 (17")	615 (1356)	32	48	52	1/2
RMF 235	40 ▶ 80	2350 (93")	2450 (97")	420 (17")	650 (1433)	36	54	60	1/2

*The experience that cultivates
the future of your land*

SICMA S.p.a. is an Italian company and a leader in
the professional agricultural machinery sector.
We design and create cutting-edge solutions for
you, the farmer of tomorrow. Innovation and
passion at your service.



MIGLIANICO | ABRUZZO | ITALY

Sicma SpA

Contrada Cerreto, 39

66010 Miglianico (CH)

Tel. +39 0871 95841

info@sicma.it - www.sicma.it

