
EN

Spaders

# 





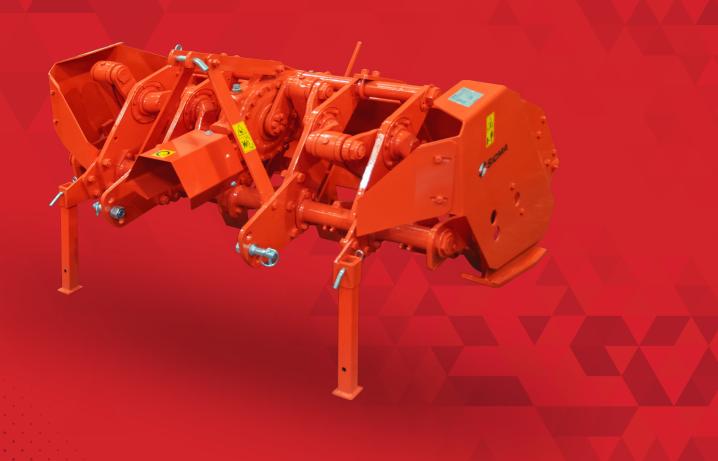










The VM is the intermediate model of the SICMA spading machine range and can be applied to tractors from 30 HP up to 60 HP. Its configuration makes it suitable for all types of crops. Furthermore the robustness of the

structure allows it to reach good working depths and to avoid clogging of the soil in conditions of high humidity. It is equipped with a 3-speed lever gear change.

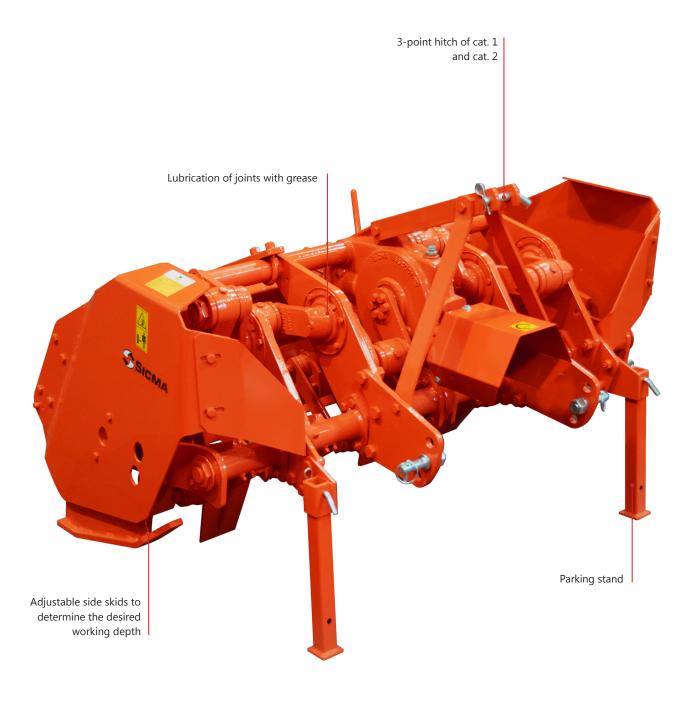



Universal shaft (Eurocardan) size 5 with flexible clutch








# **OPTIONAL**



**Side supports** 

## **TECHNICAL DATA**

### **Reducer speed:**



### **Models and Features:**

	<b>®</b> HP	mm (in)	mm (in)	kg (lbs)		cat.
VM6 125	30 ▶ 60	1250 (48")	1420 (56")	445 (981)	6	1
VM6 135	30 ▶ 60	1350 (52")	1520 (60")	454 (1000)	6	1
VM6 145	30 ▶ 60	1450 (57")	1620 (64")	500 (1102)	6	1
VM6 170	30 ▶ 60	1700 (66")	1870 (74")	568 (1252)	8	1

# The experience that cultivates the future of your land

SICMA S.p.a. is an Italian company and a leader in the professional agricultural machinery sector. We design and create cutting-edge solutions for you, the farmer of tomorrow. Innovation and passion at your service.





### Sicma SpA

Contrada Cerreto, 39 66010 Miglianico (CH) Tel. +39 0871 95841

info@sicma.it - www.sicma.it







