EN

# 


















Mower with single-speed rear attachment and discharge. For tractors with power ratings from 15 to 60 HP, available in five sizes from 1200 to 2350 mm, it is ideal for the

cutting of grass with a height of 10 to 110 mm. Can be fitted with optional mulching blades.

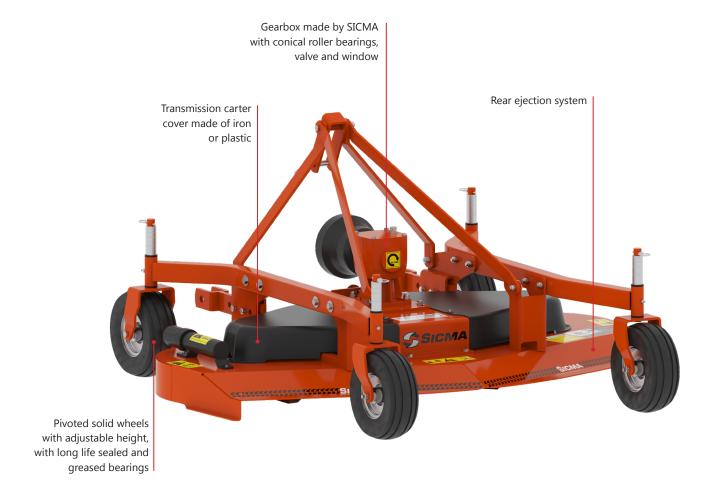



## **CONFIGURATION 1.**Finishing mowers: rear Rotation of tractor's PTO: CLOCKWISE (standard) Advancing direction: front




CONFIGURATION 2. Finishing mowers: rear Rotation of tractor's PTO: COUNTERCLOCKWISE Advancing direction: front



Universal shaft size 4





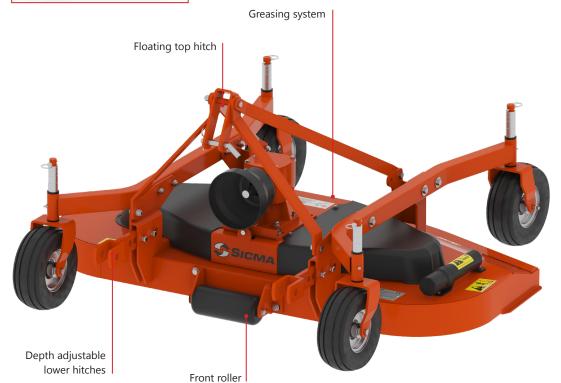



MOWER BLADE

Grass mower



MULCHING BLADE

#### **OPTIONAL**



**Mulching kit** 



Free wheel on PTO driveshaft



Front roller

#### **TECHNICAL DATA**

#### **Reducer speed:**



#### **Models and Features:**

	<b>®</b> HP	mm (in)	$\underset{i\longleftarrow i}{\overset{0}{\longleftarrow}}\underset{(in)}{mm}$	mm (in)	kg (lbs)	ø mm (in)	ø mm (in)	cat.
FA 1200	15 ▶ 60	20-110 (1-4")	1300 (51")	1200 (47)	178 (392)	280 (11")	255 (10")	1
FA 1500	15 ▶ 60	20-110 (1-4")	1600 (63")	1500 (59)	196 (432)	280 (11")	255 (10")	1
FA 1800	15 ▶ 60	20-110 (1-4")	1900 (74")	1800 (70)	214 (472)	280 (11")	255 (10")	1
FA 2100	15 ▶ 60	20-110 (1-4")	2200 (86")	2100 (82)	330 (728)	330 (13")	315 (12,5")	1
FA 2350	15 ▶ 70	20-110 (1-4")	2450 (96")	2350 (92)	340 (750)	330 (13")	315 (12,5")	1

### The experience that cultivates the future of your land

SICMA S.p.a. is an Italian company and a leader in the professional agricultural machinery sector. We design and create cutting-edge solutions for you, the farmer of tomorrow. Innovation and passion at your service.





#### Sicma SpA

Contrada Cerreto, 39 66010 Miglianico (CH) Tel. +39 0871 95841

info@sicma.it - www.sicma.it







