EN

MGM
















It consists of three rear mowers that can be assembled in four overall widths from 3600 to 6000 mm; the power required is for tractors from 35 to 70 HP and grass cutting heights from 30 to 120 mm. It can be equipped with mulching blades (optional).

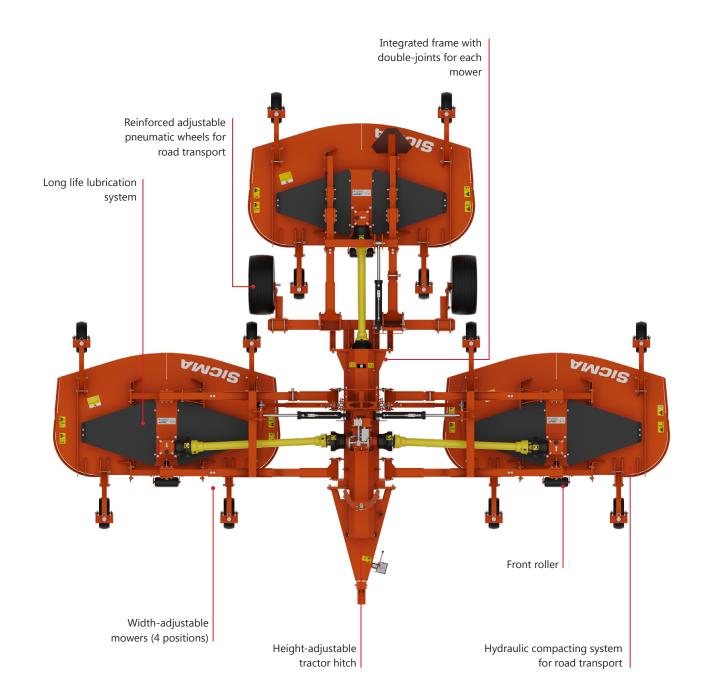



Universal shaft size 4

Gearbox made by SICMA with conical roller

bearings, valve and window







MOWER BLADE

Grass mower














TECHNICAL DATA

Reducer speed:

with long life sealed and greased bearings



Models and Features:

	⊚ MP	mm (in)	mm (in)	mm (in)	kg (lbs)	cat.
WGM 48 - 48 - 60	35 ▶ 70	30-120 (1-5")	3600 (142")	3650 (144")	1420 (3130)	1
WGM 60 - 60 - 72	35 ▶ 70	30-120 (1-5")	4500 (177")	4550 (179")	1480 (3263)	1
WGM 72 - 72 - 72	35 ▶ 70	30-120 (1-5")	5100 (201")	5150 (203")	1520 (3351)	1
WGM 84 - 84 - 84	35 ▶ 70	30-120 (1-5")	6000 (236")	6050 (238")	1980 (4365)	1

The experience that cultivates the future of your land

SICMA S.p.a. is an Italian company and a leader in the professional agricultural machinery sector. We design and create cutting-edge solutions for you, the farmer of tomorrow. Innovation and passion at your service.





Sicma SpA

Contrada Cerreto, 39 66010 Miglianico (CH) Tel. +39 0871 95841

info@sicma.it - www.sicma.it







