


PRO-1 PRO-2 WITH HARROW AND BLADE GROUP



 **SICMA**®

PRO-1 SINGLE INTERROW WITH HARROW AND BLADE GROUP

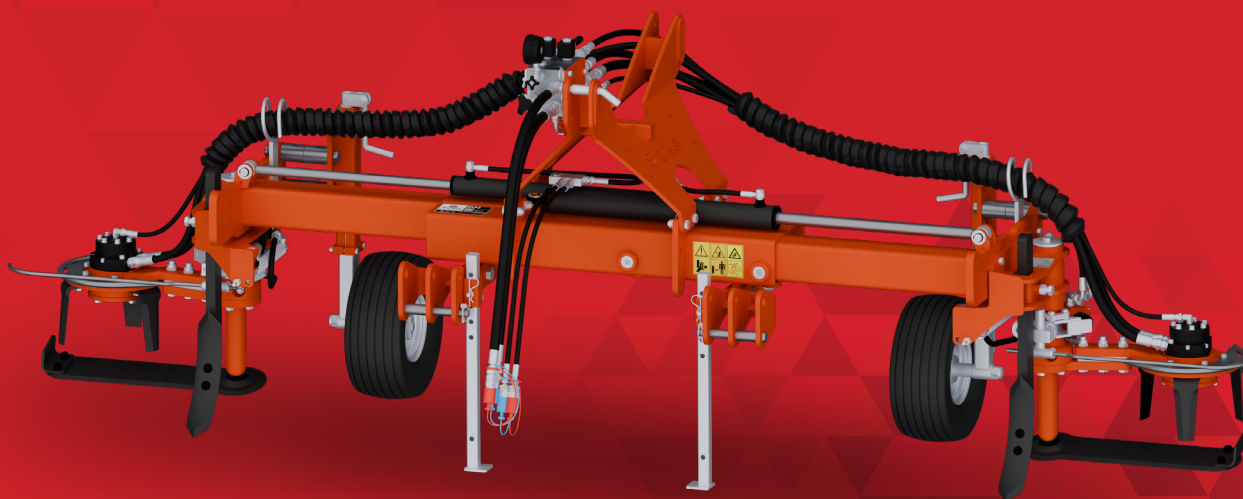


50 ► 90 HP



35-45 l/min

Tool-holder frame for professional use for interrow work; it can be equipped with a single or double travelling arm. It is compatible with both the front and rear tractor attachment and the power required

is between 50 and 90 HP. With a 500 mm blade group combined with a rotary harrow (Diam. 300 mm) with three vertical blades.

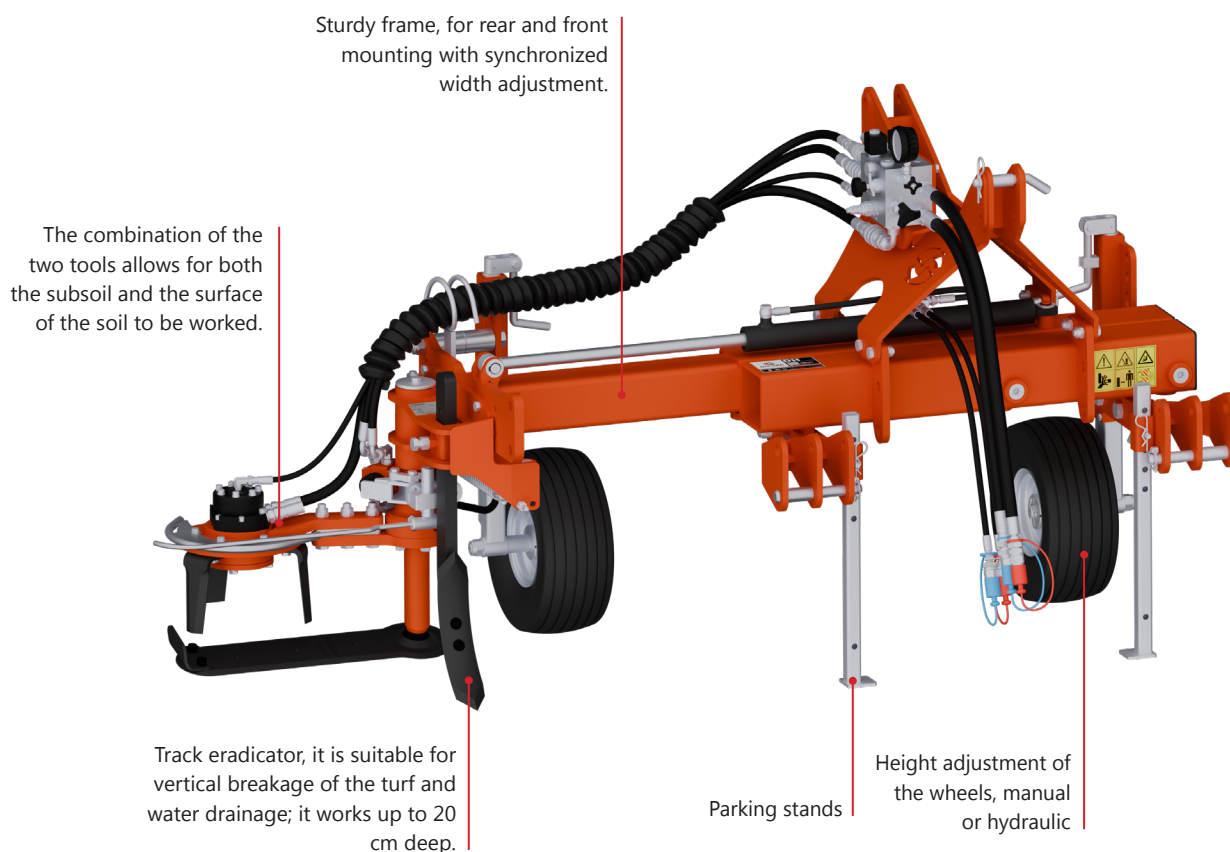

TECHNICAL DATA



Models and Features:


Mod DX / SX



50 ► 90 HP



1250



1

PRO-1 740

PRO-1 1000

PRO-1 1400

PRO-1 1800

50 ► 90

50 ► 90

50 ► 90

50 ► 90

1500

1900

2300

1-2

1-2


1-2

50 ► 90 HP

50-60 l/min

DOUBLE INTERROW
WITH HARROW
AND BLADE GROUP

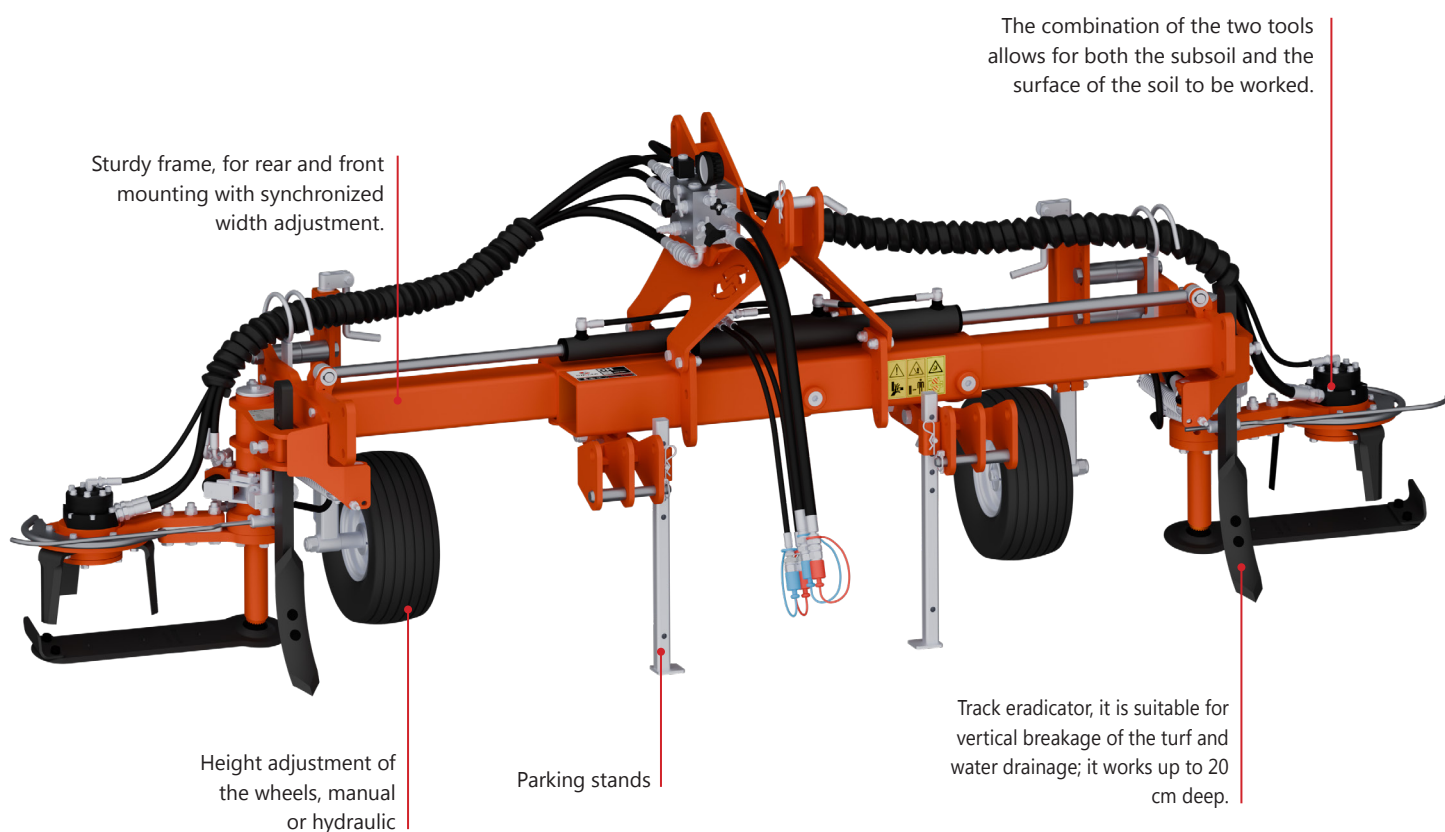



PRO-2



TECHNICAL DATA



Models and Features:

	 HP			 cat.
PRO-2 740	50 ► 90	1750	2300	1
PRO-2 1000	50 ► 90	2000	3000	1-2
PRO-2 1400	50 ► 90	2400	3400	1-2
PRO-2 1800	50 ► 90	2800	3800	1-2

HARROW AND BLADE GROUP

Weed control and soil mixing

The intensive combined action of multiple tools combats weeds with root-level cuts by the blade and simultaneous mixing of the soil thanks to the rotary

harrow and the serrated disc plough. The anchor interrupts the continuity of the plough pan caused by the blade and allow it to penetrate into harder soils.

TYPES OF BLADES

Available sizes: cm 370 / 500 / 620




Smooth blade

Works in the first 10 cm of soil to cut and remove shoots directly from the roots.



Smooth blade

Works in the first 10 cm of soil to cut and remove shoots directly from the roots. The tungsten treatment increases its service life by 300%

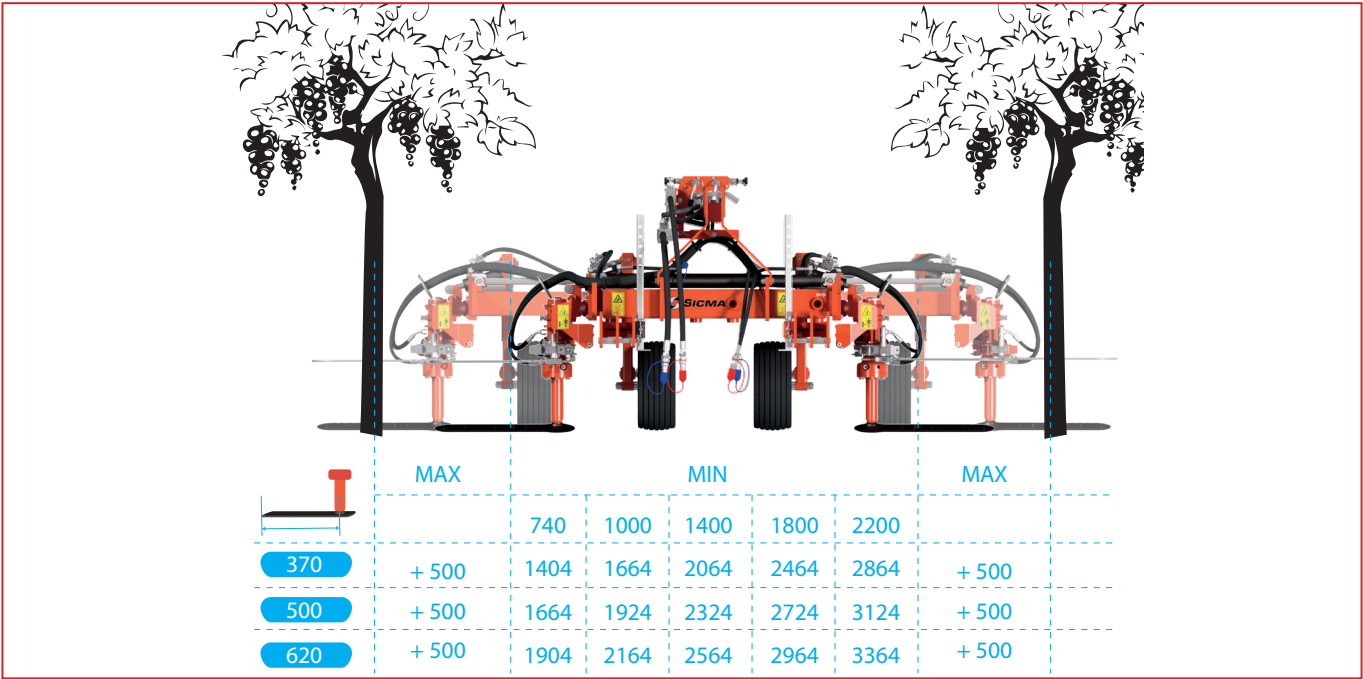


OPTIONAL HARROW AND BLADE GROUP



Dozer anchor

The anchor consists of a reversible tip made of wear-resistant material suitable for breaking up the sub-strata vertically and promoting water drainage.

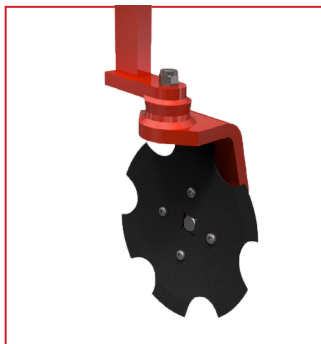

Serrated disc plough

The dozer disc cuts the way for the work of the following tool.



Pivoting Disc

The dozer disc cuts the way for the work of the following tool.

JOYSTICK


2 + 0	Tool retraction
2 + 1	Tool retraction, frame widening/closing
2 + 3	Tool retraction, frame widening/closing, tool tilt adjustment
2 + 3	Tool retraction, frame widening/closing, independent wheel adjustment
2 + 5	Tool retraction, frame widening/closing, independent wheel adjustment, tool tilt adjustment



INTERCHANGEABLE TOOLS

Using an inter-row tool for inter-row working processes of orchards and vineyards means to better manage the inter-row space with minimum environmental impact, from an agronomic point of view (management of crop residue) and for fertilization and crop protection for a

more sustainable production. The machines for working of subsoil are constantly improved, being able to adapt to different pedological conditions of the cultivation environments.

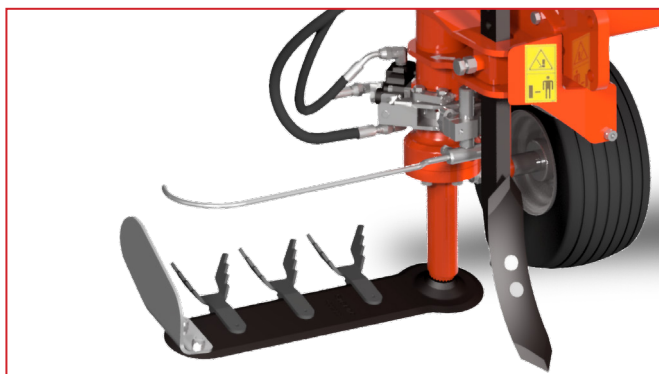

HORIZONTAL BLADE WITH SERRATED FINS IN UPPER POSITION AND ARRANGED IN A “V” SHAPE




this equipment works in the first 8 cm of soil in order to cut and eradicate weeds shoots directly from the roots.



HARROW



It consists of a flat rotor on which three blades are screwed, arranged at 120 ° with double cutting edge which favors the mixing of the soil.

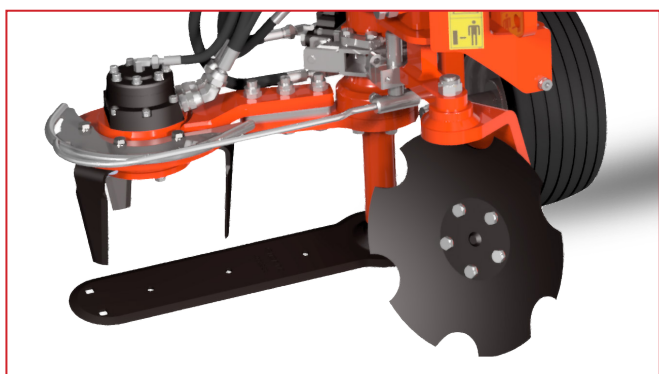

BLADE – POWER HARROW COMBINATION



the combination of the two tools allows a double working process that affects both the subsoil and the surface part of the ground.




MOWER




this is a motorised unit equipped with four 400 mm steel blades with high resistance to abrasion for mowing. The regular cutting of the turf allows to rapidly work and with minimum disturbance to the soil.

All tool-carrier frames are designed to be mounted both front and back to the tractor. Switching from one position to another is very quick and easy, by reversing the

position of the lower attachments and of the wheels. For front configuration, it is necessary to equip the machine with an additional hydraulic hose kit (on demand).

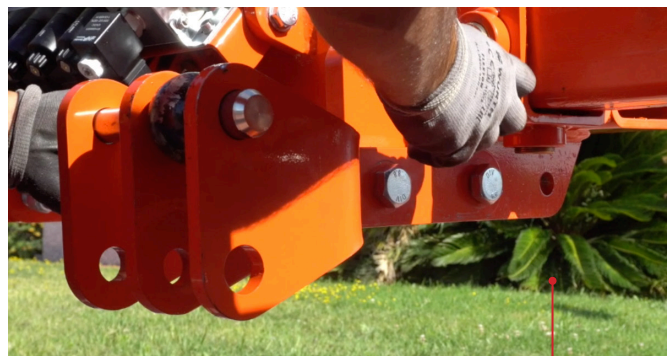

OPTIONAL FRAME

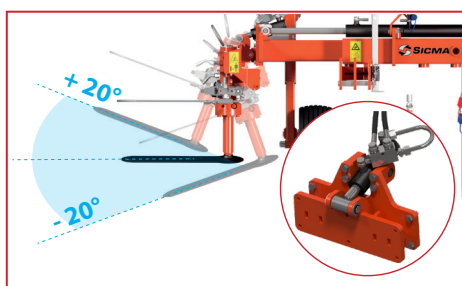


HYDRAULIC TILT INCLINATION

it allows to adapt the inclination of the tool to the soil in case of cantilever crop



INDEPENDENT HYDRAULIC UNIT

Useful for tractors that do not have a suitable circuit. Available with 60 or 30 l tanks, with heat exchanger. Version with and without cardan shaft available.

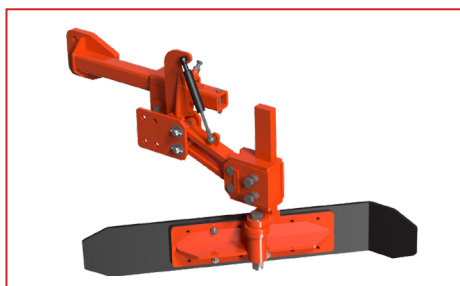

STONE PROTECTION LEVELLING BLADE

To bring the part of the soil that has been loosed back to the row.



WHEELS WITH HYDRAULIC ADJUSTMENT

*The experience that cultivates
the future of your land*

SICMA S.p.a. is an Italian company and a leader in
the professional agricultural machinery sector.
We design and create cutting-edge solutions for
you, the farmer of tomorrow. Innovation and
passion at your service.



MIGLIANICO | ABRUZZO | ITALY

Sicma SpA

Contrada Cerreto, 39
66010 Miglianico (CH)
Tel. +39 0871 95841

info@sicma.it - www.sicma.it

