



PRO-1 PRO-2 WITH MOWER DISC

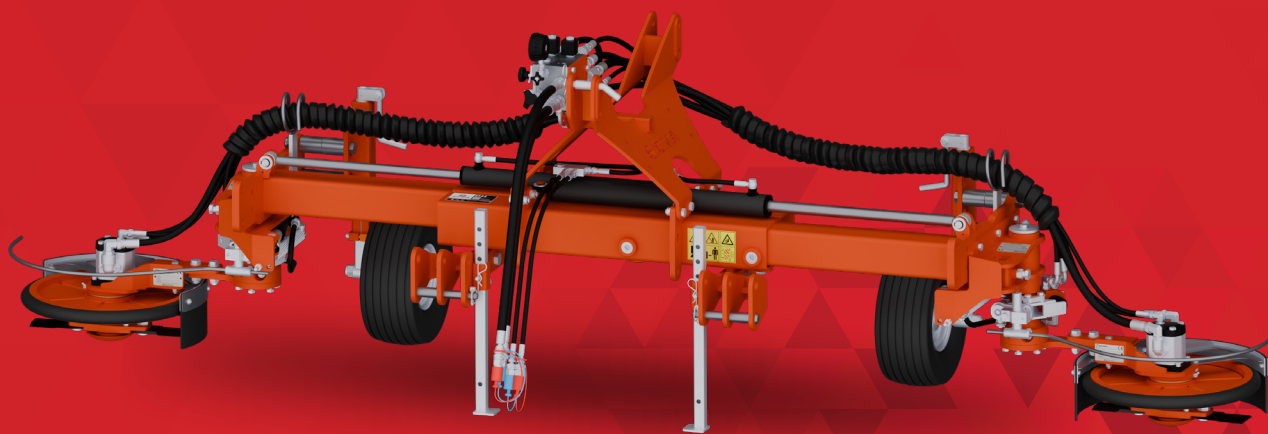

PRO-1 SINGLE INTERROW WITH MOWER DISC

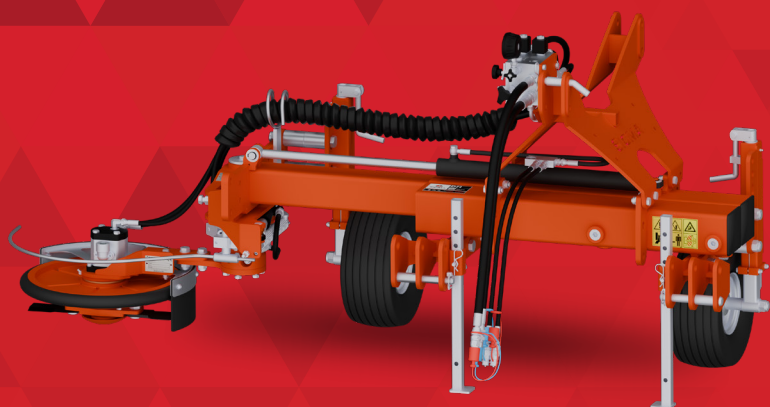

50 ► 90 HP




40-50 l/min

Tool-holder frame for professional use for interrow work; it can be equipped with a single or double travelling arm. It is compatible with both the front

and rear tractor attachment and the power required is between 50 and 90 HP. Equipped with a mower disc with a 400 mm or 600 mm diameter feeler.

Sturdy frame, for rear and front mounting with synchronized width adjustment.

It is a motorised unit equipped with 2 blades with a diameter of 400/600 mm, made of high abrasion-resistant steel for mowing. Cutting the grass sub-strata regularly allows for the work to be carried out quickly and without disturbing the ground.

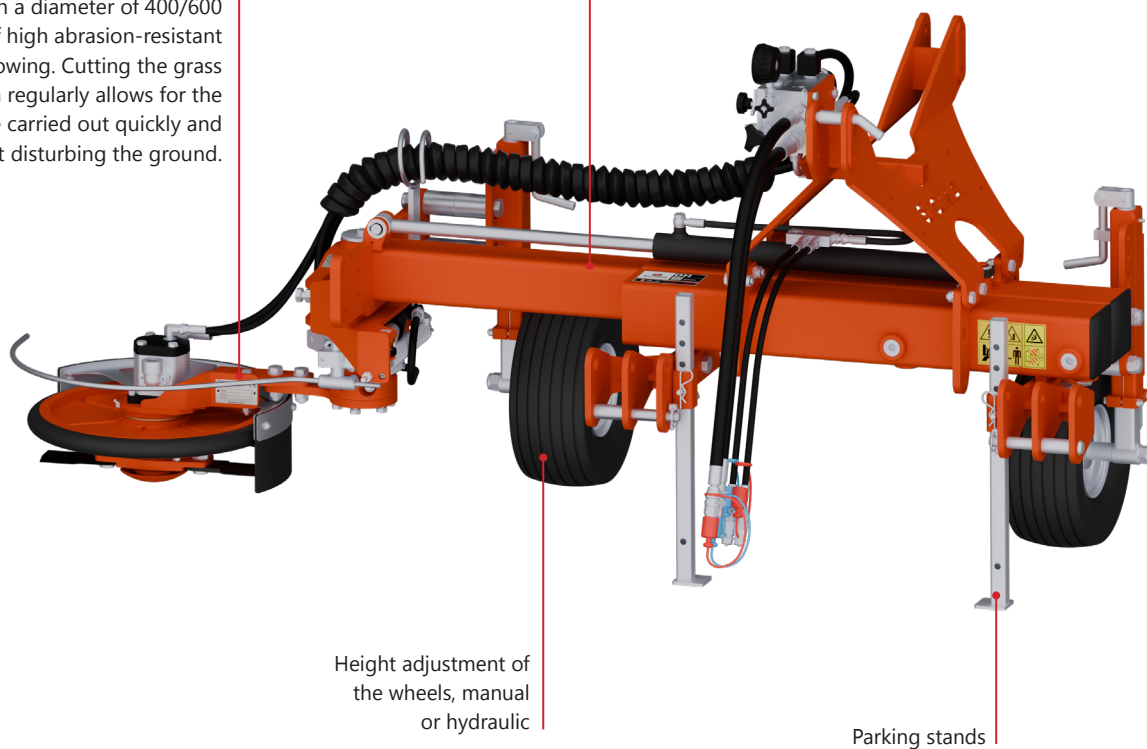

Height adjustment of the wheels, manual or hydraulic

Parking stands



TECHNICAL DATA

Models and Features:

Mod DX / SX



50 ► 90 HP



1250



1

PRO-1 740

50 ► 90

1500

1-2

PRO-1 1000

50 ► 90

1900

1-2

PRO-1 1400

50 ► 90

2300

1-2

PRO-1 1800



50 ► 90 HP



55-65 l/min

**DOUBLE INTERROW
WITH MOWER DISC**


PRO-2

It is a motorised unit equipped with 2 blades with a diameter of 400/600 mm, made of high abrasion-resistant steel for mowing. Cutting the grass sub-strata regularly allows for the work to be carried out quickly and without disturbing the ground.

Sturdy frame, for rear and front mounting with synchronized width adjustment.

Height adjustment of the wheels, manual or hydraulic

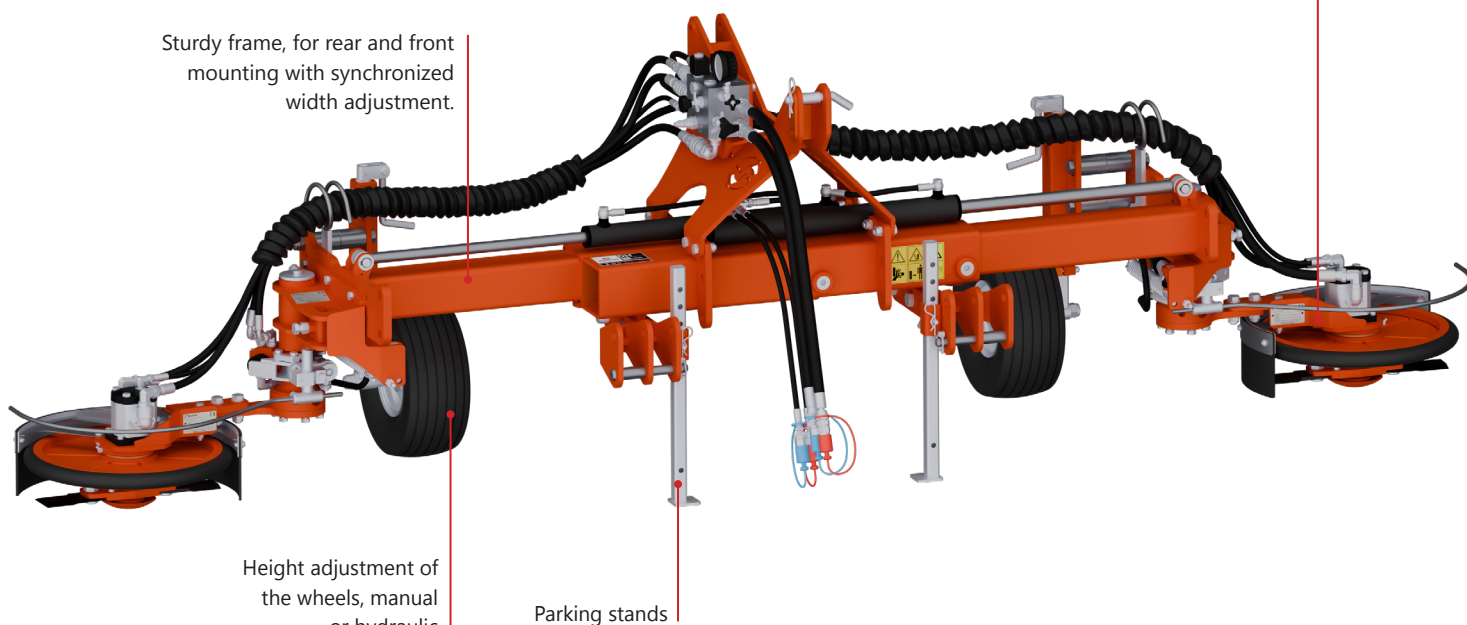



Parking stands



TECHNICAL DATA



Models and Features:

	 HP			 cat.
PRO-2 740	50 ► 90	1750	2300	1
PRO-2 1000	50 ► 90	2000	3000	1-2
PRO-2 1400	50 ► 90	2400	3400	1-2
PRO-2 1800	50 ► 90	2800	3800	1-2

JOYSTICK


2 + 0	Tool retraction
2 + 1	Tool retraction, frame widening/closing
2 + 3	Tool retraction, frame widening/closing, tool tilt adjustment
2 + 3	Tool retraction, frame widening/closing, independent wheel adjustment
2 + 5	Tool retraction, frame widening/closing, independent wheel adjustment, tool tilt adjustment



INTERCHANGEABLE TOOLS

Using an inter-row tool for inter-row working processes of orchards and vineyards means to better manage the inter-row space with minimum environmental impact, from an agronomic point of view (management of crop residue) and for fertilization and crop protection for a

more sustainable production. The machines for working of subsoil are constantly improved, being able to adapt to different pedological conditions of the cultivation environments.

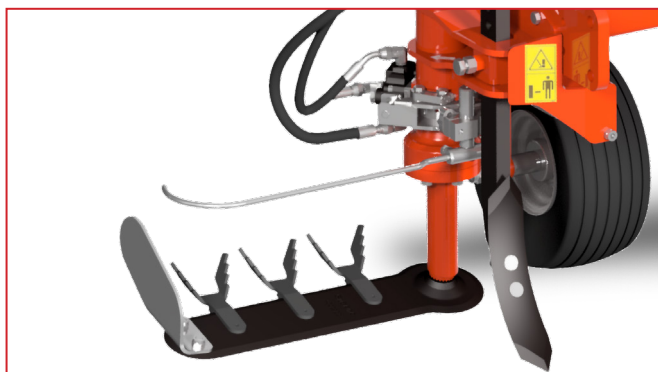

HORIZONTAL BLADE WITH SERRATED FINS IN UPPER POSITION AND ARRANGED IN A “V” SHAPE




this equipment works in the first 8 cm of soil in order to cut and eradicate weeds shoots directly from the roots.



HARROW



It consists of a flat rotor on which three blades are screwed, arranged at 120 ° with double cutting edge which favors the mixing of the soil.

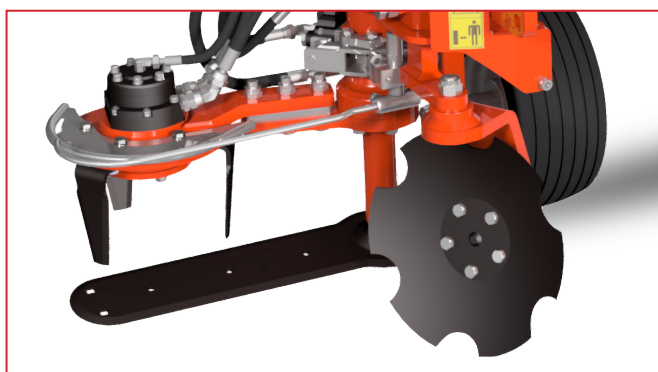

BLADE – POWER HARROW COMBINATION



the combination of the two tools allows a double working process that affects both the subsoil and the surface part of the ground.



MOWER




this is a motorised unit equipped with four 400 mm steel blades with high resistance to abrasion for mowing. The regular cutting of the turf allows to rapidly work and with minimum disturbance to the soil.

INTERROW WITH MOWER DISC

All tool-carrier frames are designed to be mounted both front and back to the tractor. Switching from one position to another is very quick and easy, by reversing the

position of the lower attachments and of the wheels. For front configuration, it is necessary to equip the machine with an additional hydraulic hose kit (on demand).

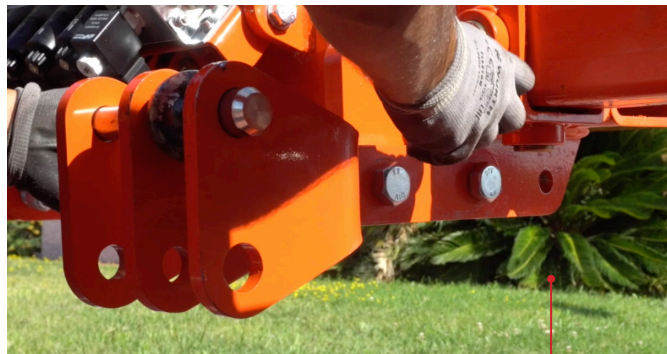

OPTIONAL FRAME



**WHEELS WITH
HYDRAULIC ADJUSTMENT**



INDEPENDENT HYDRAULIC UNIT

Useful for tractors that do not have a suitable circuit. Available with 60 or 30 l tanks, with heat exchanger. Version with and without cardan shaft available.



*The experience that cultivates
the future of your land*

SICMA S.p.a. is an Italian company and a leader in
the professional agricultural machinery sector.
We design and create cutting-edge solutions for
you, the farmer of tomorrow. Innovation and
passion at your service.



MIGLIANICO | ABRUZZO | ITALY

Sicma SpA

Contrada Cerreto, 39
66010 Miglianico (CH)
Tel. +39 0871 95841

info@sicma.it - www.sicma.it

