














Light fixed mulcher for tractors from 25 to 45 hp with available widths from 120 to 160 cm, suitable for multiple applications also thanks to the possibility of replacing the tools without the use of wrenches.

Gearbox made by SICMA, with tapered roller bearings, integrated freewheel, caps for oil input and discharge and level cap with sight glass

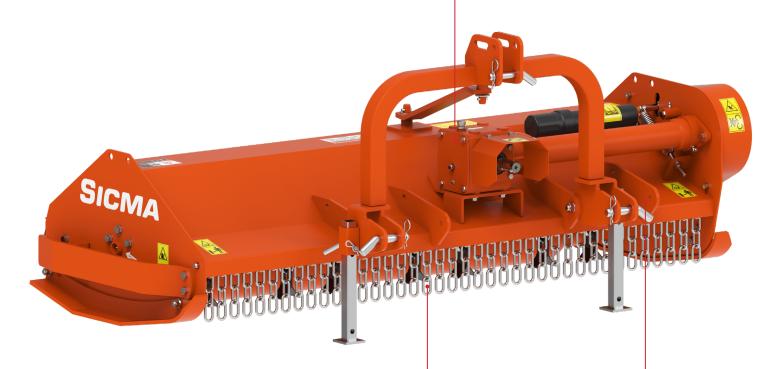

Front chain protection and rear rubber deflector for safety

Double working position: centred or offset (240 mm)

Counterblade systemin cutting chamber	
Object launch protection blades	
Transmission with V-belts and manual belt tensioner system	
Rotor supports with high reliability bearings equipped with NILOS	
lubricant seals High resistance self-	
centring pulley shrink discs	
Helical shaft	



Universal shaft (Eurocardan) size 5







OPTIONAL



SIDE SKIDS

They allow the adjustment of the working height.

Rear stabiliser roller bearings shielded and protected from contact with external agents (soil, grass, pruning waste)

TECHNICAL DATA

Reducer speed:



Models and Features:

	™ HP	mm (in)	mm (in)	kg (lbs)	nr.	nr.	nr.	cat.
TL 120	25 ▶ 45	1184 (46,6")	1373 (54,1")	148 (326)	44	22	3	1
TL 140	25 ▶ 45	1384 (54,5")	1573 (61,9")	188 (415)	52	24	3	1
TL 160	25 ▶ 45	1584 (62,4")	1773 (69,8")	238 (525)	60	30	3	1

The experience that cultivates the future of your land

SICMA S.p.a. is an Italian company and a leader in the professional agricultural machinery sector. We design and create cutting-edge solutions for you, the farmer of tomorrow. Innovation and passion at your service.





Sicma SpA

Contrada Cerreto, 39 66010 Miglianico (CH) Tel. +39 0871 95841

info@sicma.it - www.sicma.it







